


**SECTION A-A**

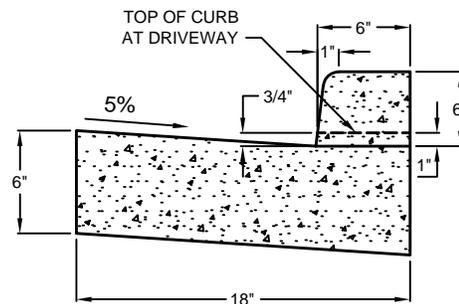

**CURB DETAIL**

**NOTES:**

1. THIS ALTERNATE SHOULD BE USED ONLY AFTER STUDYING CLOSENESS OF DRIVEWAYS, DRAINAGE, TOPOGRAPHY, DRIVEWAY GRADES, ETC.
2. CONCRETE SHALL BE CLASS B OR BETTER THAN 5-1/2 SACK, 3000 PSI.
3. INSPECTION REQUIRED BEFORE PLACING CONCRETE. AT LEAST 24 HOUR NOTICE MUST BE GIVEN TO TUKWILA PUBLIC WORKS DEPARTMENT.
4. ALL DRIVEWAY APRONS SHALL BE A MINIMUM OF 6" THICK.
5. WHERE DRIVEWAY WIDTHS EXCEED 15', A 3/8" X 5-1/2" EXPANSION JOINT SHALL BE PLACED LONGITUDINALLY ALONG THE CENTERLINE.
6. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH APWA/WSDOT PLANS AND SPECIFICATIONS OR AS DIRECTED BY THE CITY OF TUKWILA.
7. AN ASPHALT APRON MAY BE USED IN AREAS WHERE NO CURB EXISTS.
8. REMOVAL OF EXISTING CONCRETE CURB, GUTTER OR SIDEWALK SHALL BE SAW CUT TO THE NEXT JOINT.

NOT TO SCALE



**City of  
Tukwila**

**RESIDENTIAL DRIVEWAY**

**ALTERNATE 1 OF 3**

SHEET: **RS-08A**

REVISION #1: 08.03

APPROVAL: **B. SHELTON**